

d <sub>2</sub>	DIN6799 D1500 RA	d <sub>1</sub>		U							H			D A T A						
		from	to	s	Δ	d <sub>4</sub> max.	a	Δ	C <sub>2</sub>	⚖ (kg/1000)	d <sub>2</sub>	Δ	m min.	n	FN (kN)	d <sub>1</sub>	FR (kN)	g	FRg (kN)	n <sub>det.</sub> x1000 (rpm)
1.2	RA1.2	1.4	2.0	0.30	±0.02	2.90	1.01	±0.04	3.0	0.009	1.2	-0.060	0.34	0.6	0.04	1.5	0.12	0.4	0.06	47
1.5	RA1.5	2.0	2.5	0.40		3.90	1.28		4.0	0.021	1.5		0.44	0.8	0.07	2.0	0.22	0.6	0.11	42
1.9	RA1.9	2.5	3.0	0.50		4.40	1.61		4.5	0.040	1.9		0.54	1.0	0.10	2.5	0.35	0.7	0.17	40
2.3	RA2.3	3.0	4.0	0.60		5.90	1.94		6.0	0.069	2.3		0.64	1.0	0.15	3.0	0.50	0.9	0.24	38
3.2	RA3.2	4.0	5.0	0.60		6.90	2.70		7.0	0.088	3.2		0.64	1.0	0.22	4.0	0.65	0.9	0.32	35
4.0	RA4.0	5.0	7.0	0.70	±0.03	8.85	3.34	±0.048	9.0	0.158	4.0	-0.075	0.74	1.2	0.25	5.0	0.95	1.0	0.47	32
5.0	RA5.0	6.0	8.0	0.70		10.85	4.11		11.0	0.236	5.0		0.74	1.2	0.90	7.0	1.15	1.0	0.60	28
6.0	RA6.0	7.0	9.0	0.70		11.80	5.26		12.0	0.255	6.0		0.74	1.2	1.10	8.0	1.35	1.1	0.70	25
7.0	RA7.0	8.0	11.0	0.90		13.80	5.84		14.0	0.474	7.0		0.94	1.5	1.25	9.0	1.80	1.3	1.00	22
8.0	RA8.0	9.0	12.0	1.00		15.75	6.52		16.0	0.660	8.0		1.05	1.8	1.42	10.0	2.50	1.5	1.25	20
9.0	RA9.0	10.0	14.0	1.10	±0.03	18.20	7.63	±0.070	18.5	1.000	9.0	-0.090	1.15	2.0	1.60	11.0	3.00	1.6	1.50	17
10.0	RA10.0	11.0	15.0	1.20		19.70	8.32		20.0	1.120	10.0		1.25	2.0	1.70	12.0	3.50	1.8	1.75	15
12.0	RA12.0	13.0	18.0	1.30		22.70	10.45		23.0	1.770	12.0		1.35	2.5	3.10	15.0	4.70	1.9	2.30	13
15.0	RA15.0	16.0	24.0	1.50		28.70	12.61		29.0	3.370	15.0		1.55	3.0	7.00	20.0	7.80	2.2	3.30	11
19.0	RA19.0	20.0	31.0	1.75		36.50	15.92		37.0	6.420	19.0		1.80	3.5	10.00	25.0	11.00	2.5	3.60	8
24.0	RA24.0	25.0	38.0	2.00	43.50	21.88	44.0	8.550	24.0	2.05	4.0	13.00	30.0	15.00	3.0	4.00	6			





**Part Number**  
Référence Teile Nummer Referencia de pieza

**Tolerance**  
Tolérance Toleranz Tolerancia

**Weight**  
Masse Gewicht Peso

**Ring**  
Anneau/Circlips Ring Anillo

**Groove**  
Gorge Nut Ranura



DIN 6799/D1500/RA





CIRTEQ

Anneaux croissants Halbmondringe Anillos de forma creciente CRESCENT RINGS

d <sub>1</sub>	M1800 H	C								H				D A T A					
		s	Δ	d <sub>3</sub>	Δ	b	d <sub>4</sub>	C <sub>2</sub>	(kg/1000)	d <sub>2</sub>	Δ	m min.	t	n	FN (kN)	FR (kN)	g	FRg (kN)	n <sub>det.</sub> x1000 (rpm)
3	H3	0.40	-0.05	2.18	±0.06	0.90	3.98	4.1	0.02	2.3	-0.07	0.44	0.35	1.0	0.24	0.50	0.40	0.40	95
4	H4	0.40		3.00	1.00	5.00	5.2	0.04	3.2	0.44		0.40	1.2	0.37	0.50	0.40	0.40	90	
5	H5	0.60		3.80	1.20	6.20	6.4	0.08	4.0	0.64		0.50	1.5	0.58	1.10	0.60	0.70	88	
6	H6	0.70		4.80	1.30	7.40	7.6	0.11	5.0	0.74		0.50	1.5	0.72	1.65	0.70	1.10	80	
6.5	H6.5	0.70		5.60	1.30	8.20	8.4	0.12	5.8	0.74		0.35	1.0	0.55	1.70	0.70	1.05	76	
7	H7	0.80	±0.09	5.80	1.40	8.60	8.8	0.13	6.0	-0.09	0.85	0.50	1.5	0.85	2.20	0.80	1.30	69	
8	H8	0.80		6.80	1.60	10.00	10.2	0.17	7.0		0.85	0.50	1.5	0.98	2.20	0.80	1.30	67	
9	H9	1.00		7.80	1.70	11.20	11.4	0.22	8.0		1.10	0.50	1.5	1.10	3.50	1.00	2.00	58	
10	H10	1.00		8.75	1.70	12.15	12.4	0.26	9.0		1.10	0.50	1.5	1.24	3.70	1.00	2.00	50	
11	H11	1.00		9.65	1.80	13.20	13.6	0.29	10.0		1.10	0.50	1.5	1.35	4.00	1.00	2.00	40	
12	H12	1.00	±0.18	10.55	1.90	14.35	14.7	0.32	10.9	-0.11	1.10	0.55	1.7	1.65	4.20	1.00	2.00	35	
13	H13	1.00		11.40	2.00	15.40	15.8	0.36	11.8		1.10	0.60	1.8	1.90	4.50	1.00	2.00	30	
14	H14	1.00		12.30	2.00	16.30	16.7	0.40	12.7		1.10	0.65	2.0	2.20	5.00	1.00	2.00	27	
15	H15	1.00		13.20	2.10	17.40	17.8	0.46	13.6		1.10	0.70	2.1	2.60	5.50	1.00	2.00	25	
16	H16	1.00		14.10	2.20	18.50	18.9	0.54	14.5		1.10	0.75	2.3	3.00	5.80	1.00	2.00	24	
17	H17	1.00	-0.06	14.90	2.25	19.40	19.9	0.64	15.4	-0.21	1.10	0.80	2.4	3.40	6.00	1.00	2.00	23	
18	H18	1.20		15.80	2.30	20.40	20.9	0.72	16.3		1.30	0.85	2.6	3.70	8.50	1.20	2.80	21	
19	H19	1.20		16.70	2.40	21.50	22.0	0.80	17.2		1.30	0.90	2.7	4.30	9.00	1.20	2.80	21	
20	H20	1.20		17.55	2.55	22.65	23.2	0.87	18.1		1.30	0.95	2.9	4.70	9.40	1.20	3.00	20	
22	H22	1.20		19.40	2.80	25.00	25.5	1.10	19.9		1.30	1.05	3.2	5.70	1.00	1.20	3.00	17	
23	H23	1.20	±0.21	20.20	2.90	26.00	26.6	1.15	20.8	-0.21	1.30	1.10	3.3	6.20	10.50	1.20	3.20	15	
24	H24	1.20		21.10	3.00	27.10	27.7	1.52	21.7		1.30	1.15	3.5	6.80	11.00	1.20	3.20	15	
25	H25	1.20		22.00	3.15	28.30	28.9	1.74	22.6		1.30	1.20	3.6	7.50	11.50	1.20	3.20	15	
26	H26	1.20		22.90	3.25	29.40	30.0	1.88	23.5		1.30	1.25	3.8	8.00	12.00	1.20	3.20	15	
28	H28	1.50		24.60	3.50	31.60	32.2	2.32	25.2		1.60	1.40	4.2	9.70	16.50	1.50	5.50	13	
30	H30	1.50	±0.25	26.30	3.70	33.70	34.4	2.43	27.0	-0.25	1.60	1.50	4.5	11.00	17.00	1.50	5.60	13	
32	H32	1.50		28.10	4.00	36.10	36.8	3.02	28.8		1.60	1.60	4.6	12.50	18.00	1.50	5.80	13	
35	H35	1.50		30.80	4.30	39.40	40.1	3.30	31.5		1.60	1.75	5.3	15.00	20.00	1.50	5.80	11	
36	H36	1.75		31.70	4.40	40.50	41.2	4.40	32.4		1.85	1.80	5.4	16.00	25.00	1.75	8.30	10	
38	H38	1.75		33.40	4.60	42.60	43.4	4.62	34.2		1.85	1.90	5.7	17.50	26.00	1.75	8.50	10	
40	H40	1.75	±0.39	35.20	4.90	45.00	45.8	5.05	36.0	-0.25	1.85	2.00	6.0	20.00	27.50	1.75	8.80	9	
42	H42	1.75		37.00	5.10	47.20	48.0	5.46	37.8		1.85	2.10	6.3	21.50	28.00	1.75	8.90	9	
45	H45	1.75		39.60	5.50	50.60	51.5	5.98	40.5		1.85	2.25	6.8	25.00	30.00	1.75	9.00	8	
48	H48	1.75		42.30	5.90	54.10	55.0	7.82	43.2		1.85	2.40	7.2	28.00	32.00	1.75	9.00	8	
50	H50	2.00		44.00	6.20	56.40	57.4	8.85	45.0		2.15	2.50	7.5	31.00	39.50	2.00	12.00	7	
52	H52	2.00	-0.07	46.00	6.30	58.60	59.6	9.33	47.0	-0.25	2.15	2.50	7.5	32.00	41.00	2.00	12.00	7	
55	H55	2.00		48.50	6.50	61.50	63.0	10.40	50.0		2.15	2.50	7.5	34.00	43.00	2.00	12.00	7	

**Part Number**  
Référence Teile Nummer Referencia de pieza
 **Tolerance**  
Tolérance Toleranz Tolerancia
 **Weight**  
Masse Gewicht Peso
 **Ring**  
Anneau/Circlips Ring Anillo
 **Groove**  
Gorge Nut Ranura

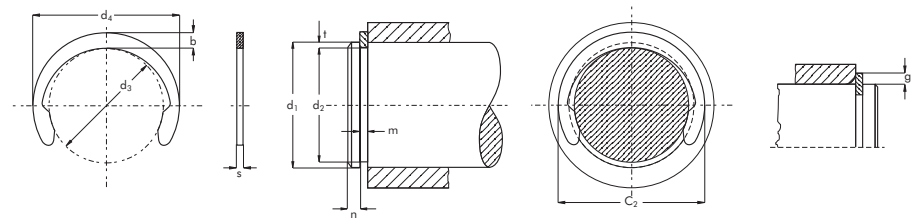

d <sub>1</sub>	N1800 NH	C						H				D A T A			
		Δ	d <sub>3</sub>	s	Δ	C <sub>2</sub>	 (lbs/1000)	d <sub>2</sub>	Δ	m	Δ	Tc	Tg	Applicators	Dispensors
0.125	NH012	+.003 -.000	0.165	0.015	±0.002	0.18	0.030	0.106	±0.015	0.018	+.002 -.000	123	34	AM50	SF50
0.156	NH015		0.205	0.015		0.22	0.052	0.135		0.018		153	46	AM8	SF51
0.188	NH018		0.244	0.015		0.25	0.062	0.165		0.018		185	61	AM10	SF52
0.219	NH021		0.275	0.025		0.29	0.120	0.193		0.029		359	80	AM53	SF53
0.236	NH023		0.295	0.025		0.31	0.150	0.208		0.029		387	93	AM54	SF54
0.250	NH025		+.004 -.000	0.311		0.025	0.33	0.157		0.220		±0.002	0.029	±0.003	+.003 -.000
0.281	NH028	0.346		0.025	0.36	0.190	0.247	0.029	461	135	AM56		SF56		
0.312	NH031	0.376		0.025	0.39	0.226	0.276	0.029	511	159	AM13		SF57		
0.375	NH037	0.448		0.025	0.47	0.300	0.335	0.029	615	212	AM58		SF58		
0.406	NH040	0.486		0.025	0.50	0.352	0.364	0.029	665	241	AM59		SF59		
0.438	NH043	+.006 -.000		0.517	0.025	0.53	0.359	0.393	±0.003	0.029	±0.004		+.004 -.000		
0.500	NH050		0.581	0.035	0.60	0.671	0.450	0.039		1150		353		AM61	SF61
0.562	NH056		0.653	0.035	0.67	0.710	0.507	0.039		1290		437		AM18	SF62
0.625	NH062		0.715	0.035	0.74	0.937	0.563	0.039		1430		548		AM38	SF63
0.688	NH068		0.784	0.042	0.80	1.300	0.619	0.046		1890		671		AM64	SF64
0.750	NH075		+.008 -.000	0.845	0.042	0.87	1.500	0.676		±0.004		0.046		±0.005	+.004 -.000
0.812	NH081	0.915		0.042	0.94	1.700	0.732	0.046	2240		918	AM66	SF66		
0.875	NH087	0.991		0.042	1.01	2.000	0.789	0.046	2410		1060	AM67	SF67		
0.938	NH093	1.058		0.042	1.08	2.300	0.843	0.046	2580		1260	AM68	SF68		
1.000	NH100	1.130		0.042	1.15	2.700	0.900	0.046	2750		1410	AM69	SF69		
1.125	NH112	+.010 -.000		1.267	0.050	1.30	4.000	1.013	±0.005		0.056	±0.003	+.003 -.000		
1.188	NH118		1.321	0.050	1.35	5.950	1.047	0.056		3890	2370				
1.250	NH125		1.415	0.050	1.44	5.100	1.126	0.056		4100	2190				
1.375	NH137		1.555	0.050	1.58	6.100	1.237	0.056		4510	2680				
1.500	NH150		1.691	0.050	1.72	7.600	1.350	0.068		4920	3180				
1.750	NH175		1.975	0.062	2.01	12.900	1.576	0.068		7110	4300				
2.000	NH200	2.257	0.062	2.30	16.200	1.800	0.068	8130	5650						


**Part Number**  
Référence Teile Nummer Referencia de pieza

**Tolerance**  
Tolérance Toleranz Tolerancia




**Weight**  
Masse Gewicht Peso

**Ring**  
Anneau/Circlips Ring Anillo

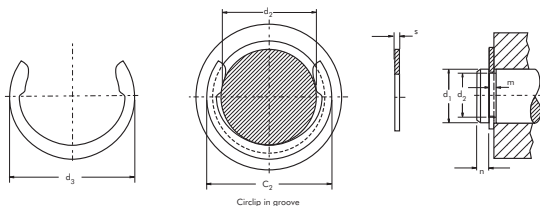**Groove**  
Gorge Nut Ranura



Colliers d'épaulement cote pouce Sicherungsscheiben Zoll-Standard Anillos de retención pulgadas standard E CLIPS INCH STANDARD

d <sub>1</sub>	N1500 NRA NRF NRG										D A T A			
		s	Δ	d <sub>3</sub>	C <sub>2</sub>	 (lbs/1000)	d <sub>2</sub>	Δ	m	Δ	Tc	Tg	Applicator	Dispenser
0.062	NRF006	0.010	±0.001	0.140	0.150	0.028	0.052	+ .002 - .000	0.012	+ .002 - .000	36	6	AM2	SF2
0.062	NRA006	0.010		0.156	0.165	0.030	0.052		0.012		36	6	AM3	SF3
0.062	NRG006	0.020		0.187	0.200	0.094	0.052		0.023		72	6	-	-
0.094	NRF009	0.015		0.230	0.245	0.100	0.074		0.018		81	17	AM7	SF4
0.094	NRA009	0.015	±0.002	0.187	0.200	0.058	0.074	+ .002 - .000	0.018	+ .003 - .000	81	17	AM5	SF5
0.110	NRF011	0.015		0.375	0.390	0.310	0.079		0.018		95	32	AM6	SF6
0.125	NRA012	0.015		0.230	0.240	0.087	0.095		0.018		108	35	AM7	SF7
0.140	NRF014	0.015		0.203	0.214	0.060	0.102		0.018		121	50	AM8	SF8
0.140	NRG014	0.015		0.250	0.265	0.100	0.110		0.018		121	39	AM10	SF10
0.140	NRA014	0.025		0.270	0.285	0.210	0.105		0.029		202	46	AM9	SF9
0.156	NRA015	0.025	0.282	0.295	0.210	0.116	0.029	225	58	AM11	SF11			
0.172	NRF017	0.025	0.312	0.325	0.240	0.127	0.029	248	72	AM12	SF12			
0.188	NRF018	0.025	0.375	0.390	0.450	0.125	0.029	271	110	AM13	SF13			
0.188	NRA018	0.025	0.335	0.350	0.290	0.147	0.029	271	72	AM14	SF14			
0.219	NRF021	0.025	±0.002	0.437	0.450	0.470	0.188	+ .003 - .000	0.029	+ .003 - .000	316	63	AM15	SF15
0.250	NRA025	0.025		0.527	0.540	0.760	0.210		0.029		361	93	AM16	SF16
0.312	NRF031	0.025		0.500	0.520	0.570	0.250		0.029		450	180	AM16	SF17
0.375	NRA037	0.035		0.660	0.680	1.500	0.303		0.039		757	252	AM18	SF18
0.438	NRA043	0.035		0.687	0.710	1.500	0.343		0.039		885	388	AM19	SF19
0.438	NRF043	0.035		0.600	0.620	1.000	0.380		0.039		884	237	AM20	SF20
0.500	NRA050	0.042	0.800	0.820	2.500	0.396	0.046	1210	485	AM21	SF21			
0.625	NRA062	0.042	0.940	0.960	3.200	0.485	0.046	1510	816	AM22	SF22			
0.744	NRF074	0.050	1.000	1.020	4.300	0.625	0.056	2160	1190	AM23	SF23			
0.750	NRA075	0.050	1.120	1.140	5.800	0.580	0.056	2520	1630	AM24	SF24			
0.875	NRA087	0.050	±0.001	1.300	1.320	7.600	0.675	+ .005 - .000	0.056	+ .004 - .000	2840	1370	AM25	SF25
0.984	NRF098	0.050		1.500	1.530	9.200	0.835		0.056		4250	1210	AM26	SF26
1.188	NRF188	0.062		1.626	1.670	11.300	1.079		0.068		4920	1860	AM27	SF27
1.375	NRF137	0.062		1.875	1.920	15.400	1.230		0.068		4920	1860	-	-


 **Part Number**  
 Référence    Teile Nummer    Referencia de pieza




 **Tolerance**  
 Tolérance    Toleranz    Tolerancia

 **Weight**  
 Masse    Gewicht    Peso

 **Ring**  
 Anneau/Circlips    Ring    Anillo

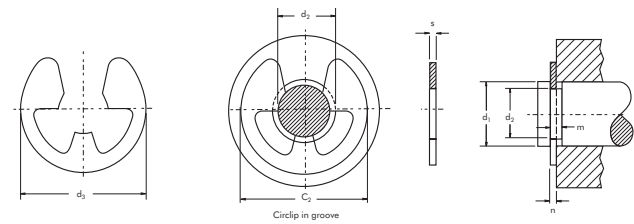 **Groove**  
 Gorge    Nut    Ranura



d <sub>1</sub>	9133 NRL												D A T A				
		s	Δ	d <sub>3</sub>	Δ	d <sub>4</sub>	C <sub>2</sub>	 (kg/1000)	d <sub>2</sub>	Δ	m min						
2	NRL2	0.25	+0.00 -0.03	1.51		4.70	4.75	0.02	1.56	+0.05 -0.00	0.30						
2.5	NRL2.5	0.40		1.99		5.30	5.37	0.04	2.06		0.45						
3	NRL3	0.40		2.23		6.00	6.07	0.05	2.30		0.45						
4	NRL4	0.60		2.89		7.15	7.37	0.10	3.10		0.67						
4.5	NRL4.5	0.60		3.50		8.00	8.10	0.13	3.60		0.67						
5	NRL5	0.60		3.68		8.50	8.62	0.14	3.80		0.67						
6	NRL6	0.60		4.70		11.10	11.19	0.18	4.80		0.67						
7	NRL7	0.60		5.25		13.40	13.54	0.20	5.40		0.67						
8	NRL8	0.60		6.17		12.70	12.93	0.24	6.40		0.67						
9	NRL9	0.80		6.85		13.80	13.95	0.39	7.00		0.90						
10	NRL10	0.80	+0.00 -0.05	7.85		15.00	15.15	0.45	8.00	+0.07 -0.00	0.90						
11	NRL11	0.80		8.45		16.40	16.55	0.56	8.60		0.90						
12	NRL12	0.80		9.45		17.70	17.85	0.58	9.60		0.90						
13	NRL13	1.00		10.10		19.00	20.61	0.82	10.24		1.10						
14	NRL14	1.00		11.10		20.40	20.54	0.95	11.24		1.10						
15	NRL15	1.00	+0.00 -0.06	11.90		21.60	21.74	1.04	12.04		1.10						
16	NRL16	1.00		12.90		23.00	23.14	1.11	13.04		1.10						
17	NRL17	1.00		13.65		24.30	24.49	1.29	13.84		1.10						
18	NRL18	1.00		14.65		25.60	25.79	1.47	14.84		1.10						
19	NRL19	1.20		15.51		26.80	26.99	1.76	15.70		1.35						
20	NRL20	1.20		16.48		28.20	28.42	2.12	16.70		1.35						
22	NRL22	1.20		18.32		30.80	31.02	2.30	18.54		1.35						
25	NRL25	1.20		21.10		34.80	38.63	2.71	21.40		1.35						
30	NRL30	1.50		25.85		41.20	41.55		26.20		1.65						
35	NRL35	1.50		30.60		47.60	47.81		31.00		1.65						


 **Part Number**  
Référence Teile Nummer Referencia de pieza

 **Tolerance**  
Tolérance Toleranz Tolerancia

 **Weight**  
Masse Gewicht Peso

 **Ring**  
Anneau/Circlips Ring Anillo

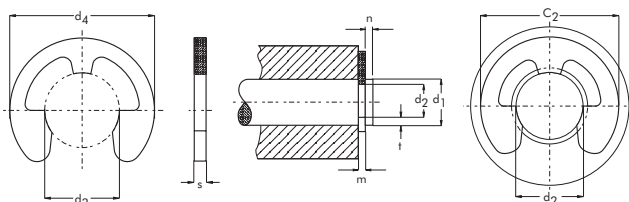


 **Groove**  
Gorge Nut Ranura



9133/NRL

**CIRTEQ**

Colliers d'épaulement cote pouce Sicherungsscheiben Zoll-Standard Anillos de retencion pulgadas standard KLIPRING INCH STANDARD

d <sub>1</sub>	N1504 NKP														D A T A	
		s	Δ	d <sub>3</sub>	Δ	D	C <sub>2</sub>	b ≈	 (lbs/1000)	d <sub>2</sub>	Δ	m	Δ	n min.	T <sub>c</sub>	T <sub>g</sub>
0.156	NKP015	0.035	±.002	0.11	±.003	0.320	0.39	0.042	0.42	0.120	±.004	0.039	+.006 -.000	0.036	428	79
0.188	NKP018	0.035		0.140		0.400	0.42	0.048	0.63	0.148	±.005	0.039		0.040	517	106
0.250	NKP025	0.035		0.188		0.482	0.52	0.056	0.84	0.210	±.006	0.039		0.040	687	141
0.312	NKP031	0.042		0.250		0.588	0.63	0.074	1.46	0.272	±.006	0.046		0.040	1030	176
0.375	NKP037	0.042		0.312		0.680	0.72	0.081	1.92	0.331	±.006	0.046		0.044	1240	233
0.438	NKP043	0.050		0.375	0.752	0.79	0.081	2.66	0.390	±.008	0.056	0.048		1720	297	
0.500	NKP050	0.050		0.406	0.826	0.89	0.097	3.30	0.440		±.008	0.056		0.060	1960	424
0.625	NKP062	0.050		0.500	0.966	1.03	0.086	4.65	0.531		±.008	0.056		0.094	2450	830
0.750	NKP075	0.062		0.564	1.095	1.17	0.095	7.48	0.632		±.010	0.068		0.118	3650	1250
1.000	NKP100	0.078		0.812	1.415	1.51	0.115	13.80	0.860			±.010		0.086	0.140	6130
1.250	NKP125	0.093	±.003	1.032	±.006	1.800	1.90	0.180	29.00	1.090	±.015	0.103	0.160	9130	2830	
1.500	NKP150	0.109		1.250		2.050	2.18	0.208	37.10	1.317		0.120	0.182	12840	3880	
1.750	NKP175	0.125		1.406		2.300	2.45	0.235	58.60	1.480		0.139	0.270	17180	6680	
2.000	NKP200	0.125		1.625		±.010	2.650	2.83	0.250	59.20		1.730	0.139	0.270	19640	7630
						±.015	2.650	2.83	0.250	59.20		1.730	0.139	0.270	19640	7630


 **Part Number**  
 Référence    Teile Nummer    Referencia de pieza




 **Tolerance**  
 Tolérance    Toleranz    Tolerancia

 **Weight**  
 Masse    Gewicht    Peso

 **Ring**  
 Anneau/Circlips    Ring    Anillo

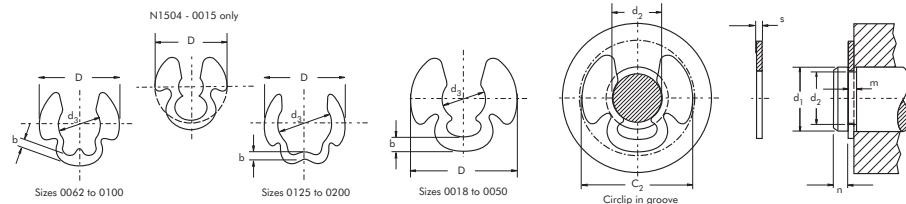 **Groove**  
 Gorge    Nut    Ranura



d <sub>1</sub>	N1540 NRH												D A T A			
		s	Δ	d <sub>3</sub>	Δ	C <sub>2</sub>	b ≈	 (lbs/1000)	d <sub>2</sub>	Δ	m	Δ	T <sub>c</sub>	T <sub>g</sub>	Applicators	Dispensors
0.094	NRH009	0.015	±.002	0.206		0.219		0.07	0.074	+.002 -.000	0.018	+.002 -.000	80	17	AM8	SF30
0.125	NRH012	0.015		0.270		0.283		0.13	0.095		0.018		110	35	AM31	SF31
0.156	NRH015	0.025		0.335		0.350		0.31	0.116		0.029		220	58	AM14	SF32
0.188	NRH018	0.025		0.375		0.390		0.39	0.147		0.029		270	72	AM33	SF33
0.219	NRH021	0.025		0.446		0.460		0.54	0.188		0.029		320	63	AM15	SF34
0.250	NRH025	0.025		0.516		0.530		0.71	0.210		0.029		360	93	AM16	SF35
0.312	NRH031	0.025	0.588	0.610	0.85	0.250	0.029	630	180	AM20	SF36					
0.375	NRH037	0.035	0.660	0.680	1.50	0.303	0.039	760	250	AM18	SF37					
0.438	NRH043	0.035	0.746	0.777	1.90	0.343	0.039	880	390	AM38	SF38					
0.500	NRH050	0.042	0.810	0.830	3.20	0.396	0.046	1210	480	AM21	SF39					
0.562	NRH056	0.042	0.870	0.890	3.50	0.437	0.046	1360	650	AM40	SF40					

 **Part Number**  
Référence Teile Nummer Referencia de pieza

 **Tolerance**  
Tolérance Toleranz Tolerancia

 **Weight**  
Masse Gewicht Peso

 **Ring**  
Anneau/Circlips Ring Anillo

 **Groove**  
Gorge Nut Ranura

